


- > cranked
- > chrome plated
- > chrome vanadium steel; forged, oil-hardened

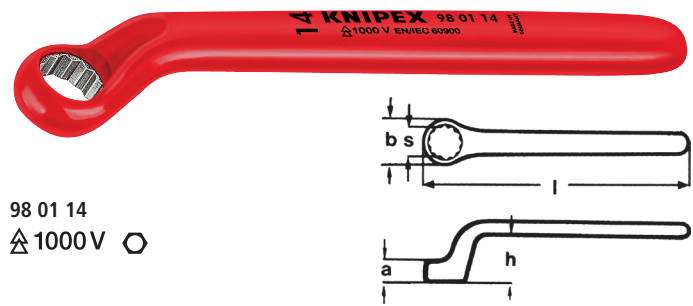

Metric Versions

Product Number	Packaging		Length l max.		Width across flats S	Head width b max.		Head thickness a max.	Depth of crank h max.	⚖ lbs
			Inch	mm		Inch	mm			
98 01 07		⚡ 1000 V ⦿	6	150.0	7.0	15/32	9/32	45/64	0.13	
98 01 08			6 7/64	155.0	8.0	35/64	9/32	3/4	0.13	
98 01 09			6 1/2	165.0	9.0	39/64	5/16	3/4	0.17	
98 01 10			6 1/4	160.0	10.0	43/64	23/64	25/32	0.17	
98 01 11			6 1/2	165.0	11.0	47/64	25/64	53/64	0.19	
98 01 12			7 1/4	185.0	12.0	47/64	25/64	29/32	0.24	
98 01 13			7 1/4	185.0	13.0	53/64	7/16	29/32	0.25	
98 01 14			7 1/2	195.0	14.0	29/32	15/32	15/16	0.30	
98 01 15			8	200.0	15.0	15/16	15/32	15/16	0.34	
98 01 16			8	200.0	16.0	1 1/32	15/32	1 1/32	0.38	
98 01 17			8	205.0	17.0	1 1/16	1/2	1 1/32	0.38	
98 01 18			8 1/4	210.0	18.0	1 9/64	1/2	1 7/64	0.53	
98 01 19			8 3/4	225.0	19.0	1 3/16	35/64	1 7/64	0.54	
98 01 22			8 3/4	225.0	22.0	1 3/8	19/32	1 3/16	0.61	

Imperial Versions

Product Number	Packaging		Length l max.		Width across flats S	Head width b max.		Head thickness a max.	Depth of crank h max.	⚖ lbs
			Inch	mm		Inch	mm			
98 01 1 1/16"		⚡ 1000 V ⦿	10 7/16	265.0	1 1/16	1 1/2	5/8	1 3/16	1.21	
98 01 11/16"			8	205.0	11/16	1 1/16	1/2	1 1/32	0.41	
98 01 3/4"			8 3/4	225.0	3/4	1 3/16	35/64	1 7/64	0.55	
98 01 5/16"			6 7/64	155.0	5/16	35/64	9/32	3/4	0.15	
98 01 5/8"			8	200.0	5/8	1 1/32	15/32	1 1/32	0.45	
98 01 7/8"			8 3/4	225.0	7/8	1 3/8	19/32	1 3/16	0.70	
98 01 9/16"			7 1/2	195.0	9/16	29/32	15/32	15/16	0.36	